

SPECIFICATION			
Scanner Performance			
Laser Pulse Repetition Rate (PRR)	600kHz	400kHz	300kHz
Max.Measuring Range@ ρ > 20% ¹⁾	250	350	450
Max.Measuring Range@ ρ > 80% ¹⁾	300	450	600
Typ. flying height	120m	200m	250m
Measurement rate	max.800,000 pts/sec		
Scanning FOV	up to 360° ²⁾		
Max. Number of return pulses Max.	12		
Measuring Range, natural targets ρ > 80%	900m		
Measuring accuracy ³⁾	15 mm (single)/ 10 mm (repeat)		
Laser safety class	Class 1 (IEC 60825-1:2014) eye-safe		
Laser wavelength	1550nm		
IMU & GNSS (Optional) ⁵⁾			
IMU Accuracy	0.01° Roll/ Pitch 0.02° Heading	0.006° Roll/ Pitch 0.019° Heading	
IMU update rate	600HZ	500HZ	
Position Accuracy	0.02m horizontal 0.04m vertical	0.01m horizontal 0.02m vertical	
General			
Absolute accuracy	±5cm (H/V) ⁴⁾		
Storage	256 G Flash Drive		
Dimensions	234mm x 112mm x 120mm (without camera)		
Weight	2kg		
Working temperature	-20°~ +55°		
IP rating	IP64		
Power consumption	40W		
RGB Camera (Optional) ⁵⁾			
Resolution	26MP	45MP	
Focal length	16mm	18mm	
Sensor size	23.5*15.6mm	36*24 mm(8192*5460)	
Pixel size	3.76um	4.4um	
FOV	73°	90°	
200 meters high resolution	4.7cm	4.9cm	

1)Typical values for average conditions.
2)Selectable. Consider limitations when integrated in kinematic systems
3)Accuracy is the degree of conformity of a measured quantity to its actual (true) value.
4)According to SOUTH test condition :150 m AGL with 8m/s speed.
5)Camera/IMU model is selectable



Powerful & Lightweight

SG130 is a multi-platform LiDAR system that combines high-resolution laser scanning and precise positional data to collect geo-referenced point cloud, which is particularly designed for geospatial survey scanning from air to ground.

Introduce

SG130 is a new generation of multi-platform LiDAR launched by South Surveying & Mapping. It has a smaller volume and lighter weight. With a measurement range of 900 meters, it can easily handle large-scale mapping tasks in complex scenarios. The cable-free design and integrated slider design allow for quick switching between multiple platforms such as unmanned aerial vehicles and vehicles.

Advantages



Multi-platform

With this LiDAR solution, more mission scenarios can be completed. Based on a 360-degree field of view and lightweight design, it can be easily installed on various drone platforms or vehicles.



Penetrability

Its detection and processing of multiple target echoes per laser pulse will provide you with effective ground points.




High accuracy

The high-precision integrated navigation algorithm combined with the scanner that can provide 5 mm repeated ranging accuracy can achieve an absolute accuracy within 5 cm.

Software

AcuteLas studio is capable to process terrestrial scanner data, aerial lidar data, and it can process data in batches, that means several groups data can be imported at the same time and process together.

Point cloud optimization

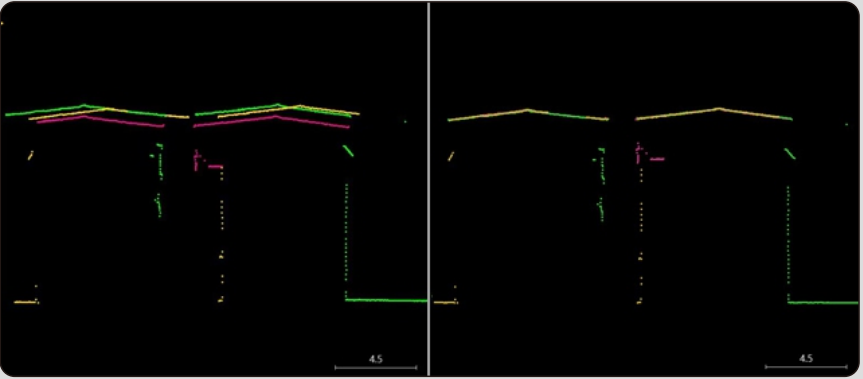


Before

After

Refine laser, navigation and orientation data to obtain seamless point cloud, with or without GCPs

Orthophoto generation

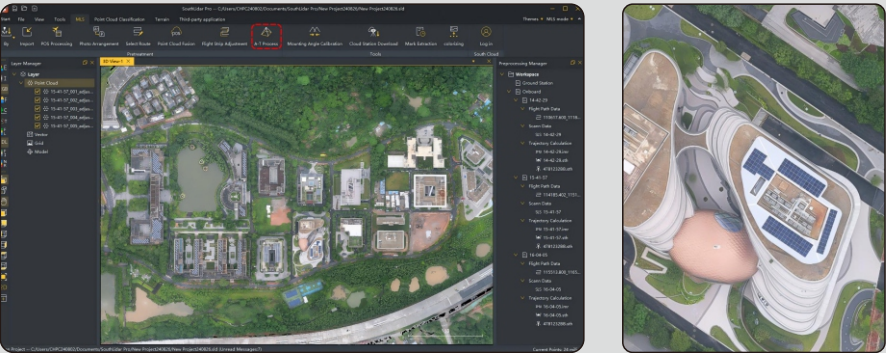

While processing point cloud data, orthophotos can be generated.

Platform



SOUTH Quadcopter SF1200



SOUTH VTOL UAV




SUV




DJI M300/M350 RTK


Point cloud classification

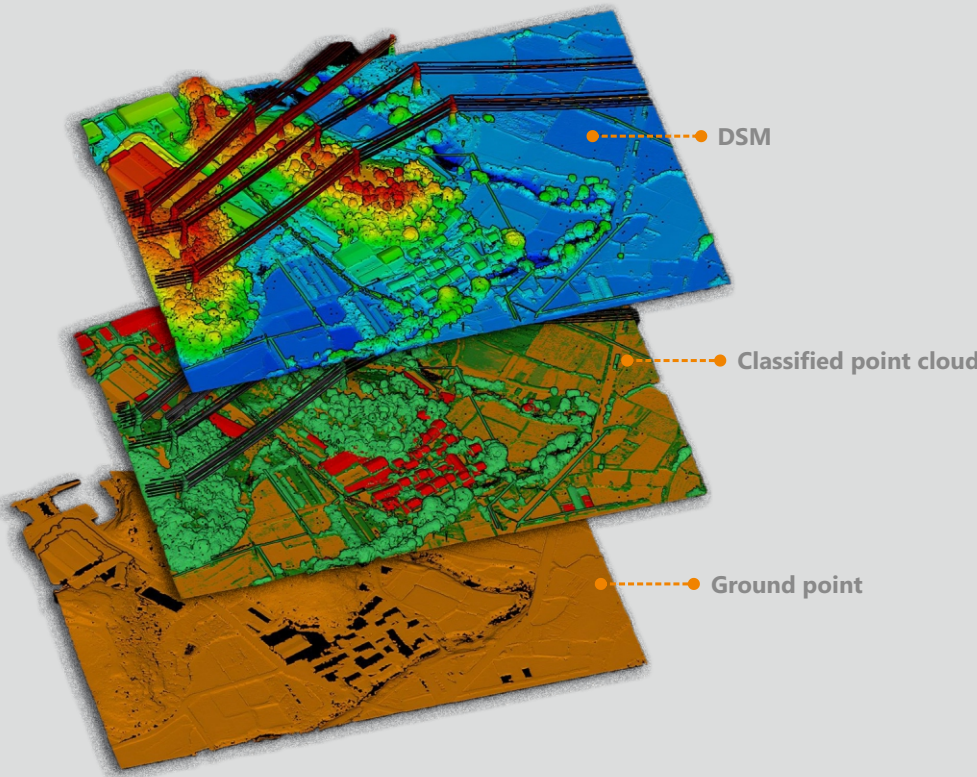


Applications

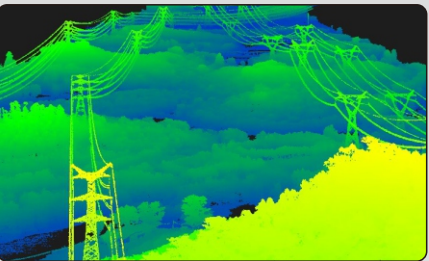


Energy & Utilities

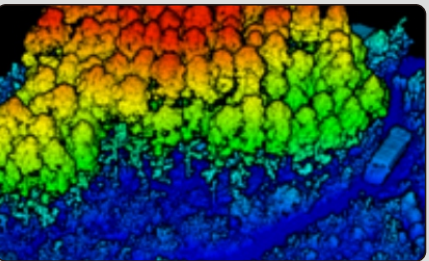


Forestry

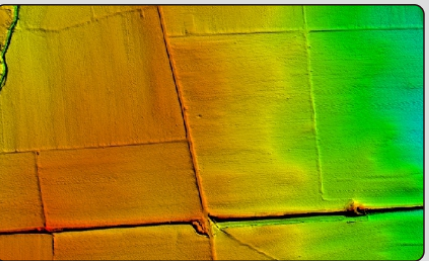

Archeology

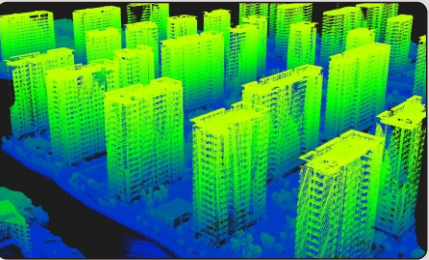


Construction & Engineering

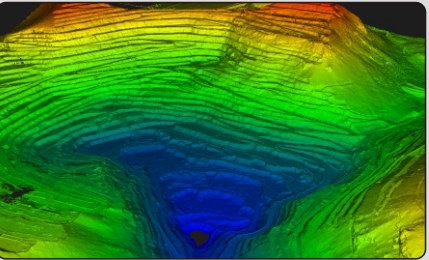


Mine




Railway

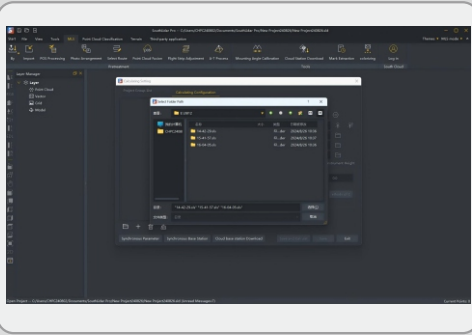


Import several flights data

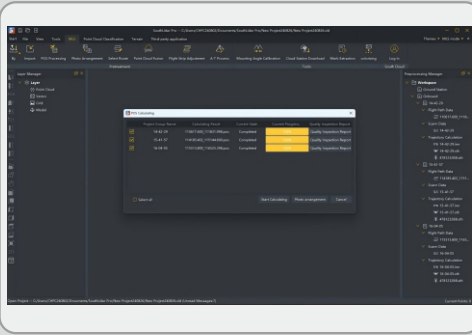

Several flights POS data processing

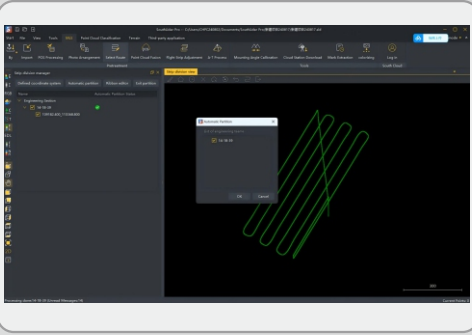

Flight strips division

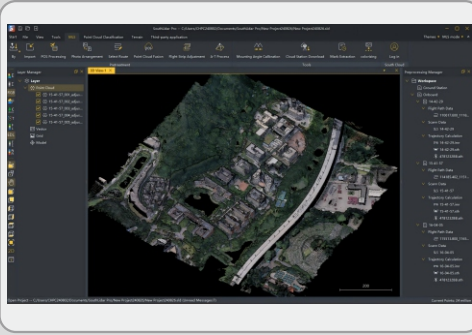

Serval flight data fusion