

SPECIFICATIONS

Angle Measurement	
Accuracy.....	1" -2"
Reading System.....	Absolute, continuous four-quadrant
Display Resolution.....	0.1"/1"
Angle Units.....	DEG 360°/GON 400/MIL 6.400

Telescope	
Magnification/ Field of view.....	30x/1°30'
Tube Length.....	154mm
Minimum focus distance.....	1.2m
Reticle.....	5 brightness levels adjustable
Objective aperture.....	45 mm (EDM: 50 mm)
Pointer.....	Red laser dot

Tilt Sensor	
Type.....	Dual axis, liquid photoelectric sensor
Compensation range/ accuracy.....	±4/1"

Distance Measurement Range	
Standard prism mode.....	3500m
Reflectorless.....	1000m(for 1" version) 800m(for 2" version)

Distance Measurement Accuracy	
Standard prism mode.....	±1 mm+1 ppm
Reflectorless.....	D<500 m: ±2 mm + 2ppm D>500 m: +5 mm + 2ppm

Measurement Time	
Standard prism mode (Tracking/Fine).....	0.1 /0.3 sec
Reflectorless.....	0.3-3 sec

Distance Measurement	
Distance Unit.....	m/US ft/INT ft
Display Resolution.....	1280×720

Motorization	
Technology.....	DC Servo Motor
Max rotation speed.....	60°/sec
Rotation time F1/F2.....	2.9 sec

APR	
Centering range.....	3-1200m(Standard prism) 800m(360°prism)
Time.....	3-5sec
Search range.....	±1.5° (Support window search)
AIM accuracy.....	±1 mm @ 100 m

PS	
Search range.....	1.5-450m
Search time.....	Typically 90°: 3.5 s
Angle.....	H: 360° V: ±18°

Laser Plummet	
Laser Type.....	Red laser dot, 635 nm
Accuracy.....	±1.5 mm at 1.5 m

Level Vial Sensitivity	
Plate level.....	30"/2 mm
Circular level.....	8'/2 mm

Environmental	
Operating Temperature.....	-30°C to +50°C(-22°F to 122°F)
Storage Temperature.....	-40°C to +70°C(-40°F to 158°F)
Waterproof/Dustproof.....	IP55
Humidity.....	95% non-condensing

Physical	
Dimensions.....	217 x 198 x378 mm
Weight (battery and tribrach inclusive)	7 kg

Electrical	
Battery Voltage/Capacity/Type.....	Li-ion rechargeable battery ×2, 5400mAh
Operating time.....	Up to 6 hours
Battery charger.....	110/220V, charging time 4h

Others	
CPU.....	MTK6762
Display.....	5.5-inch, TFT LCD screen, 720 x1280 px (2 displays)
Keyboard.....	17 keys ×2
OS.....	Android 11
Memory.....	RAM: 4GB, ROM: 64GB
Interface.....	RS232 USB Type-C (OTG) Micro SIM TF Card
Data transfer.....	Long range communication 450m WLAN USB-OTG Network 4G Temperature and pressure sensor

Onboard Field Program	
SurvStar	



SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.
E-mail: mail@southsurvey.com http://www.southinstrument.com



NS 30
Robotic Total Station

- ONE PERSON SURVEY & MONITORING
- 1" -2" ANGLE ACCURACY OPTIONAL
- 1200M APR, 450M PRISM SEARCH
- LOCKNTRACK FUNCTION
- CONVENIENT NUMERIC KEYBOARD
- NEXT GENERATION SURVSTAR

(V.202412)




CATCHES SIGHT ALL-IN-ONE

ONE ROBOTIC TS, UNLIMITED APPLICATIONS



Zigbee or Long-range BT

Excellent connectivity includes multiple communication methods like Zigbee or long-range BT, and others.

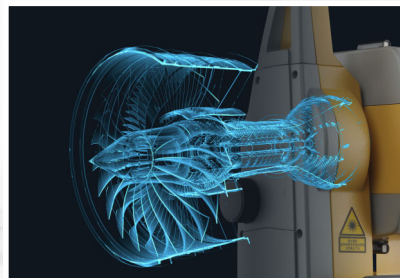

DC Servo Motor Control

Direct Worm&Gear, more stable and reliable for motorization, with positioning accuracy less than 1"



4+64GB Memory & LTE Support

NS30 has 4GB of RAM and 64GB of internal storage, making multitasking and storing files fast and stable; With 4G LTE modem, NS30 can connect to internet and share data.




Prism Search and LockNTRack

NS30 enables you to search, recognize and aim a prism in 300m. With LocknTRack, it easier to lock onto the prism and follow its movements constantly.



APR-Automatic Prism Recognition

Able to recognize the prism and measure within 1200m line of sight, accuracy best up to 1mm@100m under tough conditions

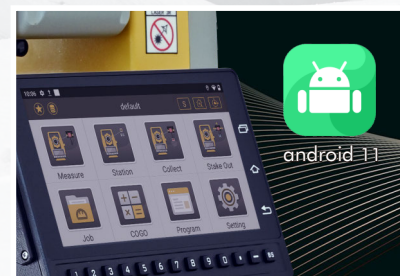

Android operating system

Android 11.0, faster system response, faster app launch. Open platform, support secondary development, can be pre-installed third-party apps.



Multiple Data Logger Options

Ready to work with different external devices such as tablets, smartphones, controllers, etc.

NS30 One Person Survey

Traditional Mode (without RTK)


Under Tradition mode, NS30 is able to achieve functions like Prism Search, APR, and LocknTRack. Also Long-range data link offers a flexible and agile remote control for One Person Survey system.

Prism Plus Position Mode (with RTK)

Prism Plus Position (PPP) mode includes NS30, RTK, 360° Prism, Prism Pole and SurvStar APP. Under this mode, SurvStar receives data from NS30 and RTK at the same time and can switch surveying mode freely: When NS30 can find prism directly, we use NS30 to survey, when there's blockings, we use RTK. With the help of RTK data, NS30 Station Setting is more convenient. RTK Search solution makes NS30 much faster to find the Prism again. All those features increases efficiency of One Person Survey system.



APPs for NS30

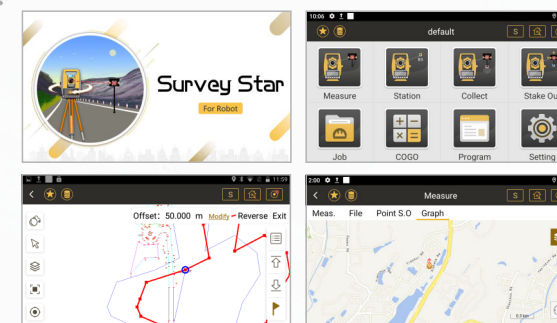

Survey Star and Survey Star Pilot

Survey Star helps you collect the data and stake out efficiently by graphical and iconic guidance.

Map-Driven Workflow-It is an interactive function embedded in Survey Star, with visible features.

CAD Stakeout-Not necessary to extract the coordinate from CAD files anymore. The only thing you need to do is import the CAD files directly to stake out the points.


SurvStar

SurvStar is next generation of Surveying and Mapping App which supports multiple platforms and multiple SOUTH instruments Besides, SurvStar has features like:

Code Library Survey-We can give Code and Graphic features to surveying points, which makes mapping and road survey easier.

High performance CAD-We can survey, stakeout, draw and edit CAD seamless switching between Survey and CAD modules. Also optimized algorithm makes SurvStar load big size CAD files faster.

PPP Mode-We can use SurvStar to connect TS and RTK at the same time to get a powerful One Person Survey system.

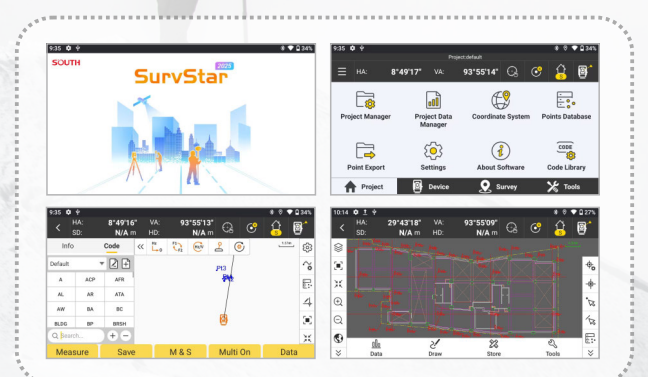

Automated Monitoring

By delivering exceptional angular and distance measurement accuracy, NS30 enables precise detection of minor displacement changes at monitoring points. This robotic device helps to improve monitoring efficiency and reduce labor costs through automated targets recognizing, aiming, measuring, data recording. Enjoying extraordinary environmental adaptability, it features superb reliability under adverse weather conditions. In addition, wireless communication on board allows users to perform remote control and data management anytime, which makes it an ideal choice for monitoring jobs.

