

N1 Series

Android Total Station



- New! Android 11.0 Operating System
- Reliable EDM - 1000m Non-Prism Range
- High Precision - 2", 2+2ppm
- User Friendly with EDM Trigger Key
- 5.5 Inches Color Touchscreen
- Fast, Simple and Flexible Data Transfer
- Intuitive Onboard Software - Survstar



Android Total Station

N1

With the proven dual-laser technology, N1 features a powerful and reliable EDM module designed for extremely long-range, fast speed and stable measurement, even under the tough conditions.

All these combined in the new-designed colorful touch screen with fast, simple and flexible data transfer, which makes you more productive than ever before.

Reliable and Outstanding EDM

- 1000m/1500m/2000m Non-prism Range Optional.
- 5000m Prism Range.
- Improved the Algorithm by Dual-Laser EDM.

Guaranteed High Precision

- 2" Angle Accuracy.
- 2+2ppm Distance Accuracy.
- Extremely Fast (0.3s) When Getting the Target.

EDM Trigger Key

- Achieve the Target by Only One Simple Button Press.
- Not Necessary to Taking Your Eyes Off the Telescope.

New Designed Control Panel

- 5.5 Inch Color Touchscreen for Higher Readability.
- User-Defined Numeric and Functional Keys.
- Unique Brightness Sensor with Virtual Button, Which Provides a Smartphone-like Experience.

Fast, Simple and Flexible Data Transfer

- Support USB-Type C, TF Card, SIM Card Slot
- Flexible Data Transfer with Bluetooth and Wi-Fi Technology.

Reliable and Outstanding EDM - 1000m Non-Prism

Guaranteed High Precision - 2", 2+2ppm


User Friendly - EDM Trigger Key

Smartphone-like Experience - Brightness Sensor with 5.5 Inch Touchscreen

Fast, Simple and Flexible Data Transfer




Digitizing Your Work by Survstar

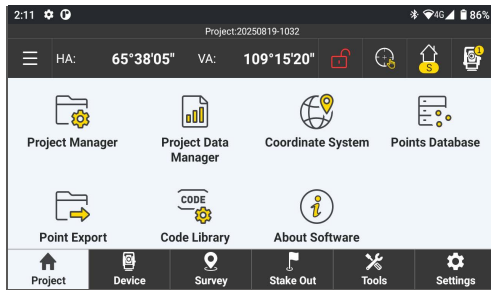

Iconic User Interface


The Survstar onboard program features an iconic display of the survey elements, like electronic bubble, e-compass, star key and iconic toolbar. It provides a better understanding for station setup, data collect, stake out in daily tasks.

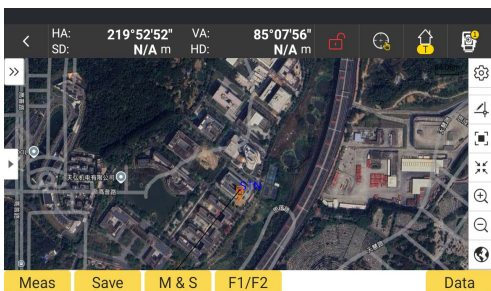

Map-Driven Workflow

Map is an interactive display feature embedded in Survstar. It offers a graphical display of the survey elements with base map, which can be downloaded by network, or imported by manual.

It provides a better understanding for data collect, stake out in daily tasks.

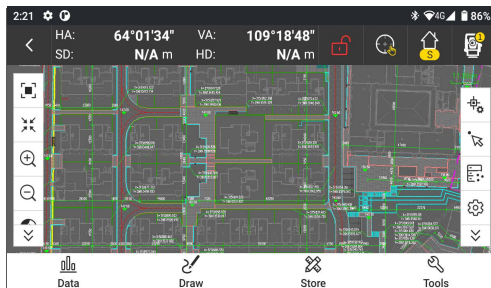


Powerful Onboard Program

Including Free Station, COGO, CAD Stake Out, Arc Stake Out, Reference Line, Traverse, etc.


CAD Stake Out

With CAD Stake Out, N1 helps to handle the data and stake out freely in DWG or DXF files. The only thing you need to do is import the CAD files to your N1 total station.

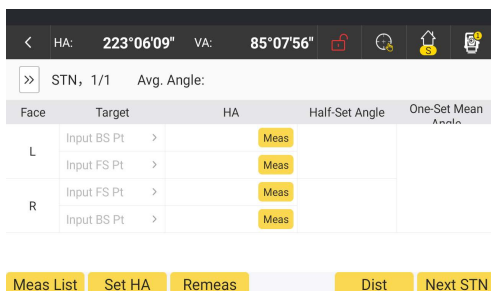

Traverse

When you've got a very difficult site with a lot of obstructions like trees, that obscures our visibility; Or when you can't measure or place the points you need, traverse on N1 total station helps to get a few more control points to work further than the first orientation.

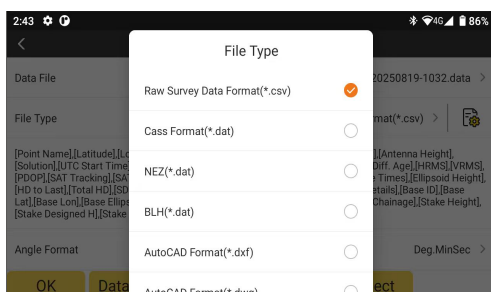

Flexible Data Manage

You can send or receive your data to your controller or PC more flexible than ever, by multiple data format, e.g. *.txt, *.dxf, *.dat, *.csv, *.xls.

When you've got a N1 total station, you will have infinite possibilities.

SPECIFICATIONS

Distance Measurement with Reflector	Range *1	5000m(Prism),1000m(Sheet)
	Accuracy	±(2+2ppmxD)mm
	Measure Interval	Fine: 0.3s, Tracking: 0.1s
Distance Measurement without Reflector	Range *2	1000m
	Accuracy	±(3+2ppmxD)mm
	Measure Interval	0.3-3s
Angle Measurement	Accuracy	2"
	Measure Method (HZ/V)	Absolute Continuous, Diametrical
	Diameter of Encoder Disk	79mm
	Display Resolution	0.1"
	Compensation	Liquid, Dual Axis Compensation
	Compensator Setting Accuracy	1"
	Compensator Range	±4'
Telescope	Image	Erect
	Tube Length	154mm
	Effective Aperture	45mm (EDM:50mm)
	Magnification	30x
	Resolving Power	3"
	Field of View	1°30"
	Focusing Range	1.2m
	Reticle	Illuminated, 4 Brightness Level
Vial	Plate Vial	30"/2mm
	Circular Vial	8'/2mm
Laser Plummet (Default)	Type	Laser Point, 4 Brightness Level
	Accuracy	±1.5mm at 1.5M Instrument Height
	Wavelength	630-670nm
	Laser Class	Class 2 /IEC60825-1
	Laser Power	<0.4mW
Optical Plummet (Optional)	Image	Erect
	Magnification	3x
	Focusing Range	0.5m~∞
	Field of View	5°
System Config	Operating System	Android 11.0
	Processor	MT6762
	Internal Memory	RAM: 4GB; ROM: 64GB
Communication	Interfaces	- Micro SIM
		- USB Type C (OTG)
		- TF Card
	Network	3G 2100/900 CDMA BC0 TDSCDMA A/F
		4G LTE band1/3/7/38/39/40/41
	Bluetooth	Bluetooth 4.0
	WLAN	Dual-Band Single Stream 802.11 a/b/g/n RF for Data Link
	Microphone / Speaker	Available
Display	Type	5.5 Inch, TFT LCD Screen, 720*1280
Battery	Type	Lithium-Ion, 7.4V
	Operating Time	8 Hours
Dimension	Size	350mm*170mm*217mm
	Weight	5.7kgs
Environmental	Temperature Range (Operation)	-20°C ~ 50°C
	Protection	IP55

*1: Good conditions (good visibility approx.40km, overcast, twilight)

*2: White objects with high reflectivity (KGC 90%)

Note: all information above is subject to change without any prior notice.